INTERFERENCE FILTERS

Specification

Material:	Fused Silica or Click this to Glass List
Dismension Tolerance:	±0.1mm
Thickness Tolerance:	±0.05mm
FWHM:	10'
Wavelength Tolerance:	±2/10nm FWHM
Peak Transmission:	>60%
Surface Quality:	80 / 50
Mounting:	Black anodized aluminum ring
Clear Aperture:	>8.0mm, 20.0mm, 45.0mm for 0.50"

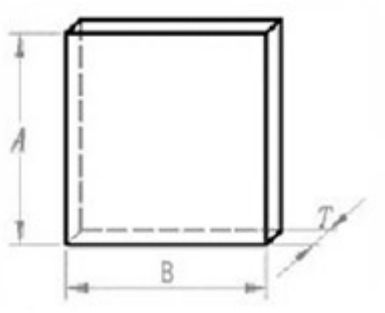

PRODUCTS LIST

Part No.	Dimensions [mm]	Thickness [mm]
SSL-RO-IF-001	5.0 × 5.0	1.5
SSL-RO-IF-002	10.0 × 10.0	3.0
SSL-RO-IF-003	12.7 × 12.7	5.0
SSL-RO-IF-004	25.4 × 25.4	6.0
SSL-RO-IF-005	5.0 × 2.5	1.5
SSL-RO-IF-006	10.0 × 5.0	3.0
SSL-RO-IF-007	25.4 × 12.7	6.0

TEL: + 86 - 21 - 56746019 Email: sales@sanctitylaser.com FAX: + 86 - 21 - 56641107
Address: 6F, Building 59, No.800 Hulin Road Shanghai China