


DOVE PRISMS

Specification

Material: N-BK7 or [Click this to Glass List](#) 

Dismension Tolerance: +0 / -0.1mm

Angle Tolerance: ±3 arc min

Precision Series: <5 arc seconds


Surface Figure: λ/4@632.8nm

Surface Quality: 40 / 20

Bevel: 0.2 - 0.5mm

Clear Aperture: >90%

Coating: Specified by customer

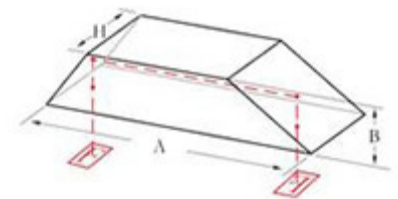

PRODUCTS LIST

Part No.	A [mm]	B [mm]	h [mm]
SSL-RO-DP-001	21.1	5.0	5.0
SSL-RO-DP-002	42.3	10.0	10.0
SSL-RO-DP-003	63.4	15.0	15.0
SSL-RO-DP-004	84.5	20.0	20.0
SSL-RO-DP-005	105.6	30.0	30.0
SSL-RO-DP-006	126.7	35.0	35.0