WEDGE PRISMS

Specification

Material:	N-BK7 or Click this to Glass List
Dismension Tolerance:	±0.1mm
Angle Tolerance:	±2 arc min.
Precision Series:	<5 arc seconds
Surface Figure:	λ/4@632.8nm
Surface Quality:	40 / 20
Bevel:	0.2 to 0.5mm × 45°
Clear Aperture:	>90%
Coating:	Specified by customer

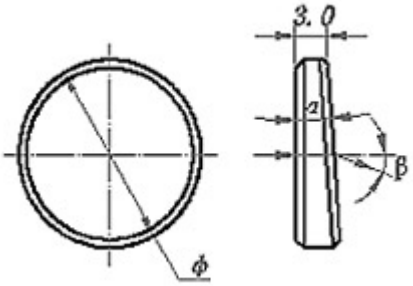

PRODUCTS LIST

Part No.	Dia [mm]	β	a
SSL-RO-WP-001	25.4	1°	1°57'
SSL-RO-WP-002	25.4	2°	3°53'
SSL-RO-WP-003	25.4	4°	7°46'
SSL-RO-WP-004	25.4	6°	11°39'

TEL: + 86 - 21 - 56746019 Email: sales@sanctitylaser.com FAX: + 86 - 21 - 56641107
Address: 6F, Building 59, No.800 Hulin Road Shanghai China