SAPPHIRE WINDOWS

Specification

Material:	Sapphire Crystal [AL203]
	or Click this to Glass List
Dismension Tolerance:	±0.1mm
Thickness Tolerance:	±0.05mm
Parallelism:	<1 arc seconds
Surface Figure:	λ/10 @632.8nm
Surface Quality:	40 / 20
Bevel:	0.25mm × 45°
Clear Aperture:	>90%
Coating:	Specified by customer

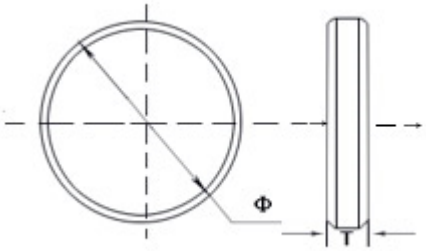

PRODUCTS LIST

Part No.	Dia [mm]	Thickness [mm]
SSL-RO-WSE-001	10.0	0.5
SSL-RO-WSE-002	10.0	1.0
SSL-RO-WSE-003	12.7	1.0
SSL-RO-WSE-004	12.7	2.0
SSL-RO-WSE-005	25.4	2.0
SSL-RO-WSE-006	25.4	3.0
SSL-RO-WSE-007	30.0	2.0
SSL-RO-WSE-008	30.0	3.0
SSL-RO-WSE-009	30.0	5.0

TEL: + 86 - 21 - 56746019 Email: sales@sanctitylaser.com FAX: + 86 - 21 - 56641107
Address: 6F, Building 59, No.800 Hulin Road Shanghai China